




7.5 Watt AC/DC, OFS7.5 Series

FEATURES

- Universal Input
- Miniature Size
- Sip Mounting
- “Power Good” LED
- 4000V Isolation
- Single & Triple outputs
- Over voltage & Over current
- Thermal Protection
- Fused Input

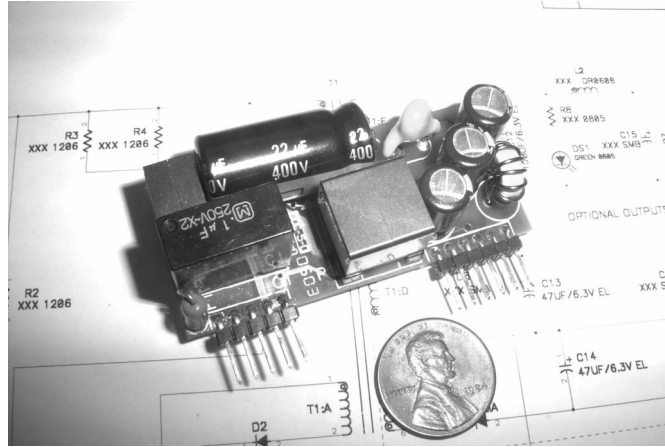

The OFS series of AC/DC power converters are designed applications where small size is critical. This series

MODEL SELECTION GUIDE

Model Number	Output (V) V1, V2 & V3	Output (I) Current Max.*	PO (W) Max.*	Output OVP
OFS-7001	2.5	2.5A	3.12	3.6V
OFS-7002	3.3	2.1A	4.13	3.9
OFS-7003	5	1.4A	6.25	6.8
OFS-7004	7	1.0A	7.00	9
OFS-7005	12	0.6A	7.00	15
OFS-7006	15	0.47A	7.00	18
OFS-7007	24	0.3A	7.00	36
OFS-7008	2.5 & +/-12.00	2.5A & +/-20A *	7.50*	3.6(Vo1)
OFS-7009	2.5 & +/-15.00	2.5A & +/-20A *	7.50*	3.6(Vo1)
OFS-7010	3.3 & +/-12.00	2.1A & +/-20A *	7.50*	3.9(Vo1)
OFS-7011	3.3 & +/-15.00	2.1A & +/-20A *	7.50*	3.9(Vo1)
OFS-7012	5.0 & +/-12.00	1.4A & +/-20A *	7.50*	6.8(Vo1)
OFS-7014	5.0 & +/-15.00	1.4A & +/-20A *	7.50*	6.8(Vo1)

* Note: The maximum output power is not to exceed 7.5W for these models.

International Coil, Inc., 15 Jonathan Drive, Unit 1, Brockton, MA 02301, Tel. 508-580-8515, Fax. 508-580-8511
www.internationalcoil.com or www.acutepower.com



7.5 Watt AC/DC, OFS7.5 Series

- Universal Input
- Miniature Size
- Sip Mounting
- "Power Good" LED
- 4000V Isolation
- Single & Triple outputs
- Over voltage & Over current
- Thermal Protection
- Fused Input

The OFS series of AC/DC power converters are designed applications where small size is critical. This series provides a universal AC input, up to 7.5 watts of output power & up to three outputs in a 2.0" X .75" area of board space.

MECHANICALS

